


### Description

The HZ30512-30 is a highly reliable amplifier which is guaranteed to deliver 30 watts of power within the 30MHz to 512MHz frequency range and related RF performance under specified temp and environmental conditions. When paired with the appropriate SDR source, it can do the jamming perfectly. This amplifier is suitable for use in defend systems in the V and U bands. It utilizes the latest high power RF GaN transistors, with protection functions to ensure high availability.

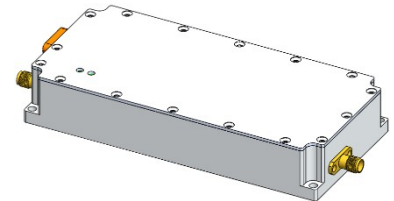

### Application and Feature

- Utilizing third-generation GaN transistors
- Ultra-wide working bandwidth and instant bandwidth
- Excellent reliability

### Specifications of Products

Electrical Specifications					
Parameter	Min	Typ	Max	Unit	Test Condition
Operating frequency	30		512	MHz	
Instant bandwidth			200	MHz	Broadband signal, such as OFDM signal
Output power ( Psat )	25	30		W	CW signal
Gain ( small signal )	36		46	dB	Measured with VNA in swept frequency mode at -20dBm. Input power calibrated/measured at the amplifier input port.
Gain flatness ( small signal )	-4		4	dB	Test condition the same as Gain
Noise figure			20	dB	
Input VSWR			1.8		Measured with VNA in swept

### Electrical Specifications

Parameter	Min	Typ	Max	Unit	Test Condition
					frequency mode at -20dBm. Input power calibrated/measured at the amplifier input port.
Spurious		-60		dBc	CW signal at the output power of 30W. Spurious defined as any non-harmonic amplifier output. Spurious measured in a 1kHz resolution bandwidth, 10kHz video bandwidth. Specifications apply at offsets of greater than or equal to $\pm 10$ kHz from the RF carrier. Maximum measurement frequency is 8GHz
Harmonics(2 <sup>nd</sup> , 3 <sup>rd</sup> )	-10			dBc	CW signal source at output power of 30W
Operating voltage	24	28	32	V	Note: Output power capabilities and gain will vary with voltage
Operating current		3.2	4	A	CW signal source at output power of 30W
PA Enable/Disable time			10	$\mu$ s	Measurement with of 30W CW output. Rise and fall time of amplifier output envelope recorded. Rise and fall times at 10%-90% of the output power in linear scale. PA Enable/Disable signal set to 10kHz repetition rate and 50% duty cycle

### Alarm and Protection

Parameter	Introductions
Over temperature	When the temperature exceeds $80^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , the amplifier automatically shut down; When the temperature drops below $70^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , the amplifier will automatically turn on.



# HZP30512-30NA1

## 30W-Solid State Broadband High Power Amplifier


Environmental Specifications				
Parameter	Min	Typ	Max	Unit
Operating temperature	-40		+60	°C
Storage temperature	-55		+85	°C
Relative Humidity (non-condensing)			+95	%
Altitude	MIL-STD-810F Method 500.4			
Vibration/Shock	Pass MIL-STD-810F - Method 514.5/516.5 – Proc I			

Mechanical Specifications		
Parameter	Value	Unit
Dimension	125×59×21.5	mm
Weight	0.5	kg
RF Connectors In/Out	Input: SMA-KFD46 Output: SMA-KFD46	-
Control Connector	D-Sub 9-Pin Female	-
Power Supply Connector	D-Sub 9-Pin Female	-
Cooling	External Heat sink	-

DC Interface Connector		
PIN#	Description	Specification
1	VDD	Supply Voltage: +24V~32V, +28V Nominal
2	VDD	Supply Voltage: +24V~32V, +28V Nominal
3	VDD	Supply Voltage: +24V~32V, +28V Nominal
4	VDD	Supply Voltage: +24V~32V, +28V Nominal
5	GND	Ground Return
6	GND	Ground Return
7	GND	Ground Return
8	PA_EN	PA on :0V or the Hanging PA off :Input 3.3V or 5V

9	Not Used	No Connection
---	----------	---------------

### Outline Drawing

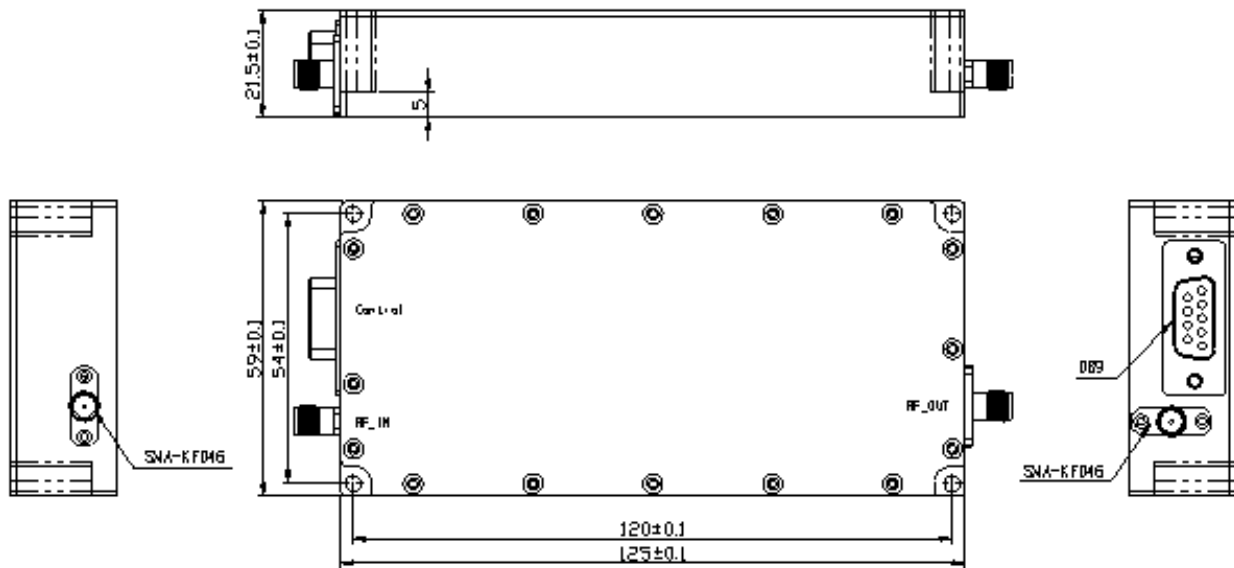

# HZP30512-30NA1

## 30W-Solid State Broadband High Power Amplifier

---

